

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz



ESP Standby Power	1562kVA	PRP Prime Power	1420kVA
ENGINE	CCEC Cummins	ALTERNATOR	STAMFORD
	KTA50-G3		S6L1D-G4

GENERAL FEATURES

Engine: CCEC Cummins KTA50-G3

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	1879	1250kW/1562kVA	1136kW/1420kVA
460/266	60	3	0.8	1961	1250kW/1562kVA	1136kW/1420kVA
440/254	60	3	0.8	2050	1250kW/1562kVA	1136kW/1420kVA
416/240	60	3	0.8	2168	1250kW/1562kVA	1136kW/1420kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

ENGINE SPECIFICATION

Manufacturer / Model	CCEC Cummins KTA50-G3
----------------------	-----------------------

Air intake system	Turbocharged, water/air cooling
-------------------	---------------------------------

Fuel system	PT type fuel pump
-------------	-------------------

Cylinder arrangement	16 in V
----------------------	---------

Displacement	50L
--------------	-----

Bore and stroke	159×159 mm
-----------------	------------

Compression ratio	13.9
-------------------	------

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	1380kW
-----------------------------------	--------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	257.7 m ³ /min
------------------	---------------------------

Exhaust temperature	475°C
---------------------	-------

Max back pressure	7kPa
-------------------	------

Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	110.4 m ³ /min
---------------------	---------------------------

Air flow required for radiator	2076 m ³ /min
--------------------------------	--------------------------

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	203g/kWh	291L/h
Fuel consumption @ 75% (Prime Power) Load	206g/kWh	222L/h
Fuel consumption @ 50% (Prime Power) Load	219g/kWh	160L/h

Oil System

Total oil capacity	177L
Oil sump capacity	121-151L

Cooling System

Coolant capacity	310L
Max water temperature	104°C

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	1431kVA
Alternator Efficiency	94.9%

MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	


MODEL: BF-C1375-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

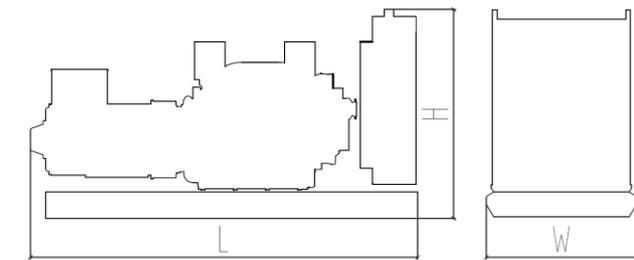

Standard Configuration (open type)

Overall Dimensions: 4950×2000×2500 mm

Weight: 9600 kg

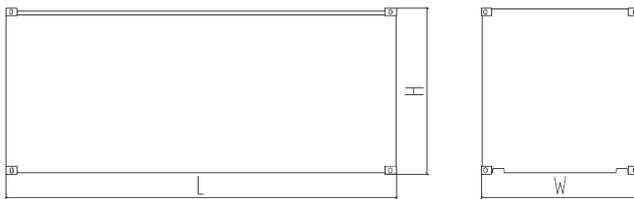

Soundproof Type (standard 20'ft GP container)

Overall Dimensions: 6058×2438×2591 mm

Weight: 14600 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
 WEBSITE: WWW.BAIFAPOWER.COM
 EMAIL: MARKETING@BAIFAPOWER.COM
 TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

