

MODEL: BF-C312-60

440V | 1800rpm | 60Hz



ESP Standby Power	344kVA	PRP Prime Power	310kVA
ENGINE	CCEC Cummins	ALTERNATOR	STAMFORD
	NTA855-G1		S4L1D-C41

GENERAL FEATURES

Engine: CCEC Cummins NTA855-G1

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C312-60

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	414	275kW/344kVA	248kW/310kVA
460/266	60	3	0.8	432	275kW/344kVA	248kW/310kVA
440/254	60	3	0.8	451	275kW/344kVA	248kW/310kVA
416/240	60	3	0.8	477	275kW/344kVA	248kW/310kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-C312-60

440V | 1800rpm | 60Hz

ENGINE SPECIFICATION

Manufacturer / Model	CCEC Cummins NTA855-G1
Air intake system	Turbocharged, water/air cooling
Fuel system	PT type fuel pump
Cylinder arrangement	6 in line
Displacement	14L
Bore and stroke	140×152 mm
Compression ratio	14.5
Rated speed	1800rpm
Max. Standby power at rated speed	317kW
Governor type	Electronic

Exhaust System

Exhaust gas flow	75.2 m ³ /min
Exhaust temperature	543°C
Max back pressure	10kPa

Air Intake System

Max intake restriction	6.2kPa
Combustion air flow	27.8 m ³ /min
Air flow required for radiator	588 m ³ /min

MODEL: BF-C312-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	202.9g/kWh	66.9L/h
Fuel consumption @ 75% (Prime Power) Load	206.5g/kWh	51.2L/h
Fuel consumption @ 50% (Prime Power) Load	218.8g/kWh	37.1L/h

Oil System

Total oil capacity	38.6L
Oil sump capacity	28.4-36L

Cooling System

Coolant capacity	68L
Max water temperature	104°C

MODEL: BF-C312-60

440V | 1800rpm | 60Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	310kVA
Alternator Efficiency	92.1%

MODEL: BF-C312-60

440V | 1800rpm | 60Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB



MODEL: BF-C312-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

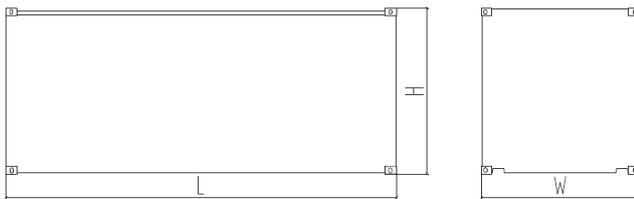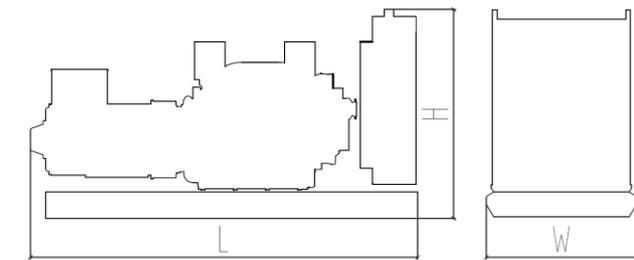

Standard Configuration (open type)
Overall Dimensions: 3100×1100×1900 mm
Weight: 2770 kg
Soundproof Type
Overall Dimensions: 4230×1460×2150 mm
Weight: 4135 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
 WEBSITE: WWW.BAIFAPOWER.COM
 EMAIL: MARKETING@BAIFAPOWER.COM
 TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

