

MODEL: BF-C688-60

440V | 1800rpm | 60Hz



<b>ESP</b> Standby Power	<b>750kVA</b>	<b>PRP</b> Prime Power	<b>N/A</b>
<b>ENGINE</b>	CCEC Cummins	<b>ALTERNATOR</b>	STAMFORD
	KTAA19-G6A		S5L1D-E41

### GENERAL FEATURES

Engine: CCEC Cummins KTAA19-G6A

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C688-60

440V | 1800rpm | 60Hz

### GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	902	600kW/750kVA	N/A
460/266	60	3	0.8	941	600kW/750kVA	N/A
440/254	60	3	0.8	984	600kW/750kVA	N/A
416/240	60	3	0.8	1041	600kW/750kVA	N/A

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

### SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-C688-60

440V | 1800rpm | 60Hz

## ENGINE SPECIFICATION

Manufacturer / Model	CCEC Cummins KTAA19-G6A
----------------------	-------------------------

Air intake system	Turbocharged, Air/Air Cooling
-------------------	-------------------------------

Fuel system	PT type fuel pump
-------------	-------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	19L
--------------	-----

Bore and stroke	159×159 mm
-----------------	------------

Compression ratio	13.9
-------------------	------

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	664kW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

### Exhaust System

Exhaust gas flow	159.4 m <sup>3</sup> /min
------------------	---------------------------

Exhaust temperature	502°C
---------------------	-------

Max back pressure	10kPa
-------------------	-------

### Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	58.1 m <sup>3</sup> /min
---------------------	--------------------------

Air flow required for radiator	768 m <sup>3</sup> /min
--------------------------------	-------------------------

MODEL: BF-C688-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Standby Power) Load	214g/kWh	163L/h
Fuel consumption @ 75% (Standby Power) Load	N/A	N/A
Fuel consumption @ 50% (Standby Power) Load	N/A	N/A

Oil System

Total oil capacity	50L
Oil sump capacity	32-38L

Cooling System

Coolant capacity	115L
Max water temperature	104°C

MODEL: BF-C688-60

440V | 1800rpm | 60Hz

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	713kVA
Alternator Efficiency	94.9%

MODEL: BF-C688-60

440V | 1800rpm | 60Hz

## GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

## STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB



MODEL: BF-C688-60

440V | 1800rpm | 60Hz

### OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

### DIMENSIONS & WEIGHT

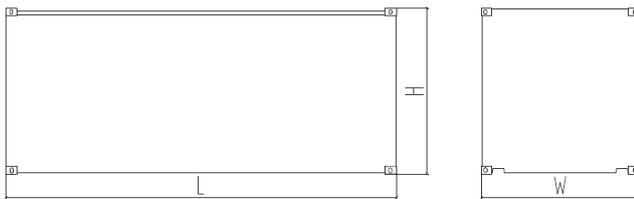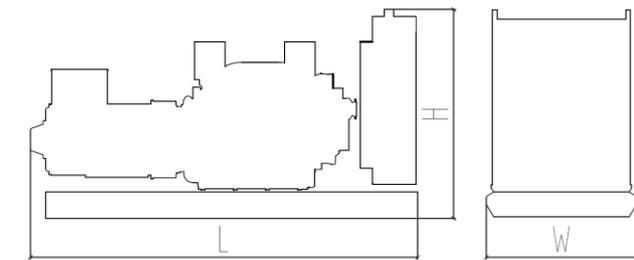

Standard Configuration (open type)
Overall Dimensions: 3720×1450×2200 mm
Weight: 4550 kg
Soundproof Type
Overall Dimensions: 5530×1860×2550 mm
Weight: 6800 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.  
 WEBSITE: WWW.BAIFAPOWER.COM  
 EMAIL: MARKETING@BAIFAPOWER.COM  
 TEL: +86-510-85342633

Comprehensive Solutions For  
**POWER GENERATION**

