


MODEL: BF-BD330

400V | 1500rpm | 50Hz

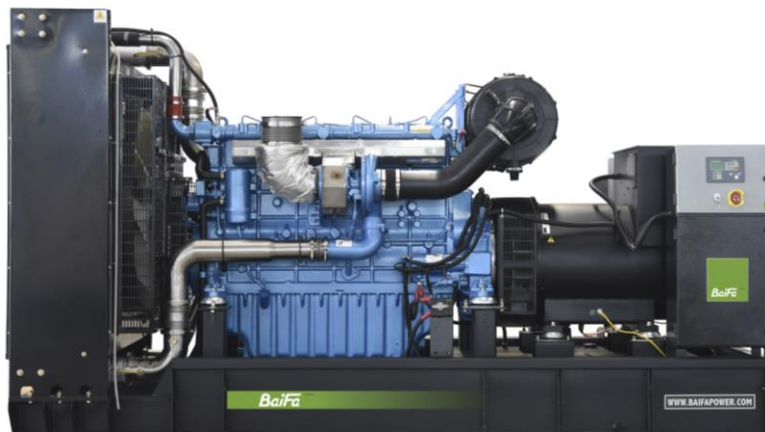

ESP Standby Power	330 kVA	PRP Prime Power	300 kVA
ENGINE	Baudouin 6M16G350/5	ALTERNATOR	LEROY SOMER TAL-A46-F

GENERAL FEATURES

Engine: Baudouin 6M16G350/5

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-BD330**400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	433	264kW/330kVA	240kW/300kVA
415/240	50	3	0.8	459	264kW/330kVA	240kW/300kVA
400/230	50	3	0.8	476	264kW/330kVA	240kW/300kVA
380/220	50	3	0.8	501	264kW/330kVA	240kW/300kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

MODEL: BF-BD330**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Baudouin 6M16G350/5
----------------------	---------------------

Air intake system	Turbo, intercooling
-------------------	---------------------

Fuel system	Mechanical pump
-------------	-----------------

Cylinder arrangement	6 cylinders in line
----------------------	---------------------

Displacement	9.726 L
--------------	---------

Bore and stroke	126×130 mm
-----------------	------------

Compression ratio	17:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	320KW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	58.2 m ³ /min
------------------	--------------------------

Exhaust temperature	550°C
---------------------	-------

Max back pressure	11 kPa
-------------------	--------

Air Intake System

Max intake restriction	7 kPa
------------------------	-------

Combustion air flow	21 m ³ /min
---------------------	------------------------

Air flow required for radiator	450 m ³ /min
--------------------------------	-------------------------

**MODEL: BF-BD330****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	204 g/kWh	66L/h
Fuel consumption @ 75% (Prime Power) Load	201.7 g/kWh	49L/h
Fuel consumption @ 50% (Prime Power) Load	204.5 g/kWh	34L/h

Oil System

Total oil capacity	30L
Oil consumption ratio based on fuel consumption data	$\leq 0.2\%$
Oil sump capacity	19-22L

Cooling System

Coolant capacity	42L
Max water temperature	105°C



MODEL: BF-BD330

400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	300kVA
Alternator Efficiency	92.3%



MODEL: BF-BD330

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

Base fuel tank


MODEL: BF-BD330

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

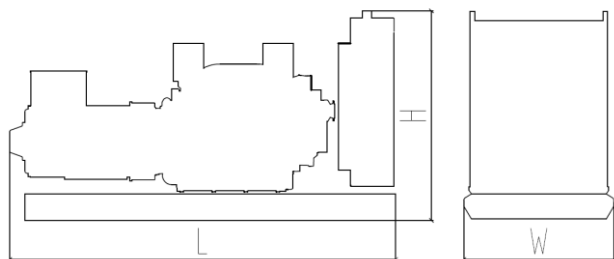

Standard Configuration (open type with base fuel tank)

Overall Dimensions: 2900×1020×1570 mm

Weight: 2620 kg

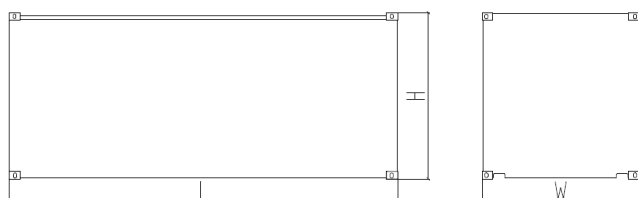

Soundproof Type

Overall Dimensions: 4090×1460×2150 mm

Weight: 3870 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION