


MODEL: BF-C170-60

440V | 1800rpm | 60Hz

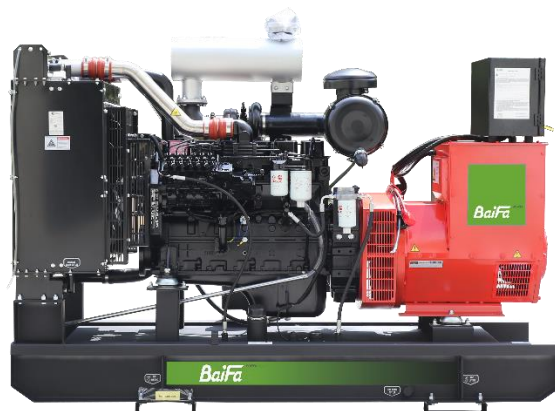

ESP	180kVA	PRP	168kVA
Standby Power		Prime Power	
ENGINE	DCEC Cummins	ALTERNATOR	STAMFORD
	6BTAA5.9-G12		UCI274E1

GENERAL FEATURES

Engine: DCEC Cummins 6BTAA5.9-G12

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual



MODEL: BF-C170-60

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	217	144kW/180kVA	134kW/168kVA
460/266	60	3	0.8	226	144kW/180kVA	134kW/168kVA
440/254	60	3	0.8	236	144kW/180kVA	134kW/168kVA
416/240	60	3	0.8	250	144kW/180kVA	134kW/168kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-C170-60

440V | 1800rpm | 60Hz

ENGINE SPECIFICATION

Manufacturer / Model	DCEC Cummins 6BTAA5.9-G12
Air intake system	Turbocharged, Air/Air Cooling
Fuel system	P7100 fuel pump
Cylinder arrangement	6 in line
Displacement	5.9L
Bore and stroke	102×120 mm
Compression ratio	17.3
Rated speed	1800rpm
Max. Standby power at rated speed	165kW
Governor type	Electronic

Exhaust System

Exhaust gas flow	26.3 m ³ /min
Exhaust temperature	458°C
Max back pressure	10kPa

Air Intake System

Max intake restriction	6.2kPa
Combustion air flow	11.8 m ³ /min
Air flow required for radiator	348 m ³ /min



MODEL: BF-C170-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	208g/kWh	37.9L/h
Fuel consumption @ 75% (Prime Power) Load	205g/kWh	28.3L/h
Fuel consumption @ 50% (Prime Power) Load	214g/kWh	20.4L/h

Oil System

Total oil capacity	16.4L
Oil sump capacity	12.3~14.2L

Cooling System

Coolant capacity	37L
Max water temperature	104°C

MODEL: BF-C170-60

440V | 1800rpm | 60Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	167.5kVA
Alternator Efficiency	91.7%

MODEL: BF-C170-60

440V | 1800rpm | 60Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
------------------------------	--	-----------

Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
-----------------	---	------

Base fuel tank


MODEL: BF-C170-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

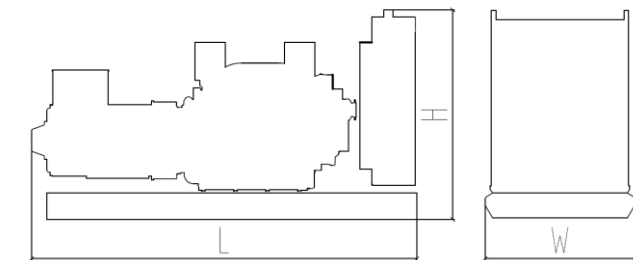

Standard Configuration (open type)

Overall Dimensions: 2450×900×1700 mm

Weight: 1360 kg

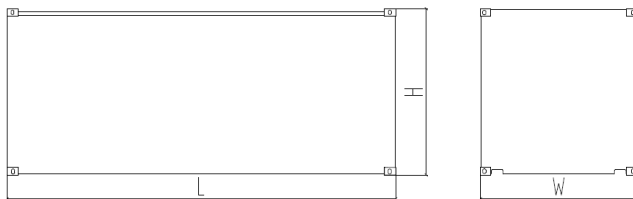

Soundproof Type

Overall Dimensions: 3230×1170×1800 mm

Weight: 2140 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION