

MODEL: BF-C440Q

400V | 1500rpm | 50Hz



ESP Standby Power	440 kVA	PRP Prime Power	400 kVA
ENGINE	CCEC Cummins	ALTERNATOR	STAMFORD
	QSNT-G3		S4L1D-F41

GENERAL FEATURES

Engine: CCEC Cummins QSNT-G3

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C440Q**400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	577	352/440	320/400
415/240	50	3	0.8	612	352/440	320/400
400/230	50	3	0.8	635	352/440	320/400
380/220	50	3	0.8	669	352/440	320/400

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-C440Q**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins QSNT-G3
Air intake system	Turbo, Air-Air cooling
Fuel system	CELECT
Cylinder arrangement	6 in line
Displacement	14L
Bore and stroke	140*152 (mm)
Compression ratio	16.7:1
Rated speed	1500rpm
Max. Standby power at rated speed	392KW/525HP
Governor type	Electronic

Exhaust System

Exhaust gas flow	77 m ³ /min
Exhaust temperature	500 °C
Max back pressure	10kpa

Air Intake System

Max intake restriction	6.2kPa
Combustion air flow	30.66 m ³ /min
Air flow required for radiator	618 m ³ /min

MODEL: BF-C440Q

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	205 g/kWh	86.2 L/h
Fuel consumption @ 75% (Prime Power) Load	213 g/kWh	67.4 L/h
Fuel consumption @ 50% (Prime Power) Load	226 g/kWh	48.8 L/h

Oil System

Total oil capacity	38.6L
Oil consumption	≤4g/kwh
Oil sump capacity	28.4~36L

Cooling System

Coolant capacity	85L
Max water temperature	104°C

MODEL: BF-C440Q**400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	415kVA
Alternator Efficiency	93.2%

MODEL: BF-C440Q**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools

MCCB


MODEL: BF-C440Q

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

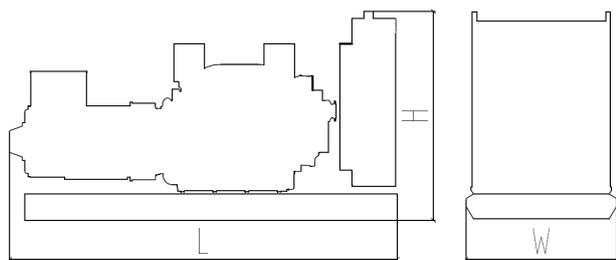

Standard Configuration (open type)

Overall Dimensions: 3300×1300×1900 mm

Weight: 3200 kg

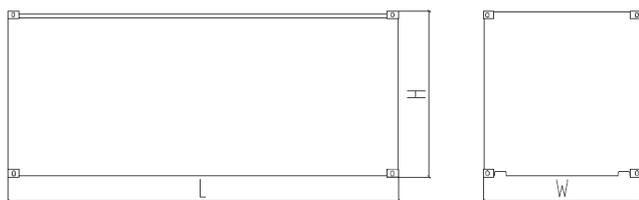

Soundproof Type

Overall Dimensions: 4230×1660×2250 mm

Weight: 4620 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

