


MODEL: BF-M1700-60

440V | 1800rpm | 60Hz

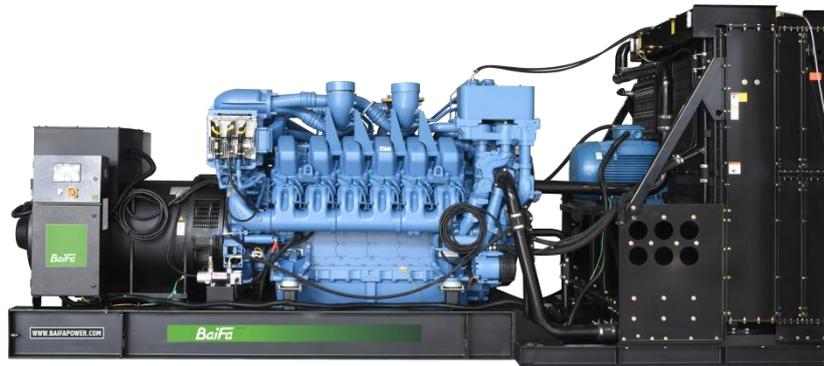

ESP Standby Power	N/A	PRP Prime Power	1750kVA
ENGINE	MTU	ALTERNATOR	STAMFORD
	12V4000G14S		S7L1D-C4

GENERAL FEATURES

Engine: MTU 12V4000G14S	Alternator: single bearing, IP23, insulation class H
40°C radiator, fans are driven by motor, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: BF-M1700-60

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Prime Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	2105	N/A	1400kW/1750kVA
460/266	60	3	0.8	2197	N/A	1400kW/1750kVA
440/254	60	3	0.8	2296	N/A	1400kW/1750kVA
416/240	60	3	0.8	2429	N/A	1400kW/1750kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-M1700-60**440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	MTU 12V4000G14S
Air intake system	Turbocharged, water/air intercooling
Fuel system	Electronic Fuel Injection System
Cylinder arrangement	12 in V
Displacement	57.2L
Bore and stroke	170x210 mm
Compression ratio	16.4
Rated speed	1800rpm
Max. Standby power at rated speed	1672kW
Governor type	ADEC

Exhaust System

Exhaust gas flow	324 m ³ /min
Exhaust temperature	425°C
Max back pressure	8.5kPa

Air Intake System

Max intake restriction	5kPa
Combustion air flow	138 m ³ /min
Air flow required for radiator	1980 m ³ /min

MODEL: BF-M1700-60**440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	196g/kWh	349L/h
Fuel consumption @ 75% (Prime Power) Load	199g/kWh	268L/h
Fuel consumption @ 50% (Prime Power) Load	212g/kWh	194L/h

Oil System

Total oil capacity	260L
Oil consumption	0.3% of Fuel Consumption
Oil sump capacity	160-200L

Cooling System

Coolant capacity	435L
Max water temperature	102°C

MODEL: BF-M1700-60**440V | 1800rpm | 60Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	S7L1D-C4
Alternator Efficiency	1819kVA

MODEL: BF-M1700-60**440V | 1800rpm | 60Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Fuel-Water separator

MODEL: BF-M1700-60

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT



Standard Configuration (open type)

Overall Dimensions: 5950x2100x2600 mm

Weight: 12400kg

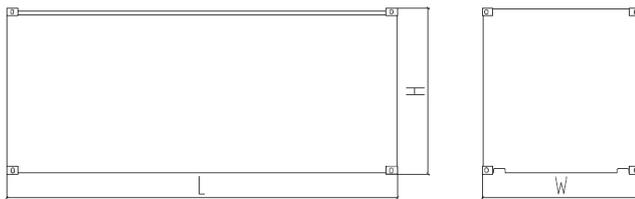

Soundproof Type (standard 20'ft HQ container)

Overall Dimensions: 6058x2438x2896 mm

Weight: 17400kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

