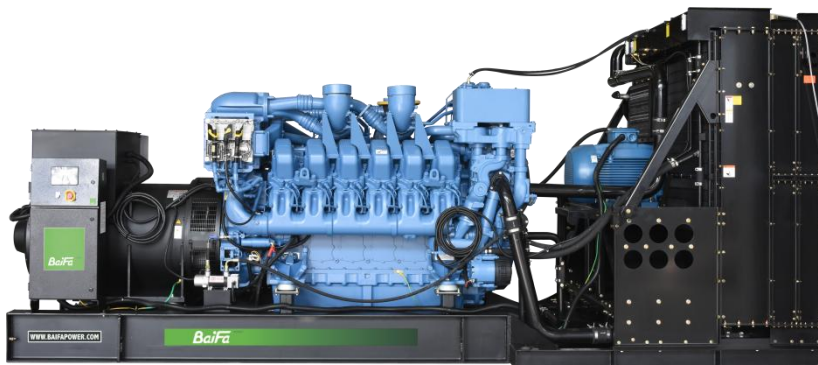


MODEL: BF-M2000-60

440V | 1800rpm | 60Hz



ESP

Standby Power

2200kVA

PRP

Prime Power

2000kVA

ENGINE

MTU

12V4000G83S

ALTERNATOR

STAMFORD

S7L1D-F4

GENERAL FEATURES

Engine: MTU 12V4000G83S

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by motor, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-M2000-60****440V | 1800rpm | 60Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	2646	1760kW/2200kVA	1600kW/2000kVA
460/266	60	3	0.8	2761	1760kW/2200kVA	1600kW/2000kVA
440/254	60	3	0.8	2887	1760kW/2200kVA	1600kW/2000kVA
416/240	60	3	0.8	3053	1760kW/2200kVA	1600kW/2000kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-M2000-60**440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	MTU 12V4000G83S
Air intake system	Turbocharged, water/air intercooling
Fuel system	Electronic Fuel Injection System
Cylinder arrangement	12 in V
Displacement	57.2L
Bore and stroke	170×210 mm
Compression ratio	16.4
Rated speed	1800rpm
Max. Standby power at rated speed	1910kW
Governor type	ADEC

Exhaust System

Exhaust gas flow	354 m ³ /min
Exhaust temperature	440°C
Max back pressure	8.5kPa

Air Intake System

Max intake restriction	5kPa
Combustion air flow	144 m ³ /min
Air flow required for radiator	1980 m ³ /min



MODEL: BF-M2000-60

440V | 1800rpm | 60Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	200g/kWh	404L/h
Fuel consumption @ 75% (Prime Power) Load	198g/kWh	301L/h
Fuel consumption @ 50% (Prime Power) Load	211g/kWh	218L/h

Oil System

Total oil capacity	260L
Oil consumption	0.3% of Fuel Consumption
Oil sump capacity	160-200L

Cooling System

Coolant capacity	451L
Max water temperature	102°C

MODEL: BF-M2000-60

440V | 1800rpm | 60Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	2212kVA
Alternator Efficiency	95.8%

MODEL: BF-M2000-60

440V | 1800rpm | 60Hz

GENERATING SET DATA

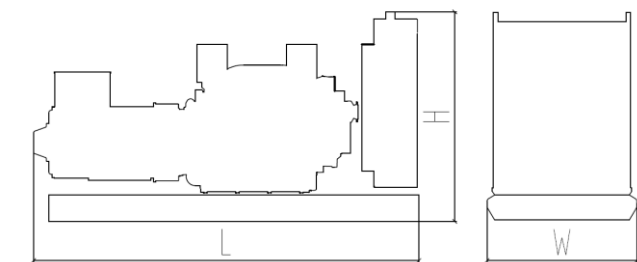
Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Fuel-Water separator

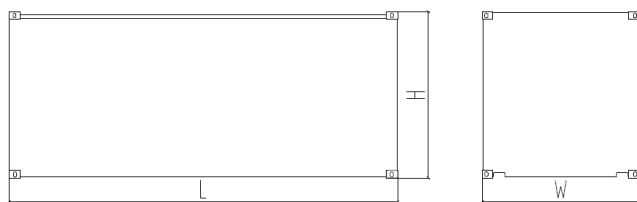
MODEL: BF-M2000-60**440V | 1800rpm | 60Hz****OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 6260×2100×2600 mm

Weight: 13000kg

**Soundproof Type (standard 40'ft HQ container)**

Overall Dimensions: 12192×2438×2896 mm

Weight: 23000kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION