

**MODEL: BF-P2250**

**400V | 1500rpm | 50Hz**



<b>ESP</b> Standby Power	<b>2250 kVA</b>	<b>PRP</b> Prime Power	<b>2050 kVA</b>
<b>ENGINE</b>	<b>Perkins</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>4016TAG2A</b>		<b>S7L1D-G41</b>

**GENERAL FEATURES**

Engine: Perkins 4016TAG2A	Alternator: single bearing, IP23, insulation class H
40°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

**MODEL: BF-P2250**

**400V | 1500rpm | 50Hz**

**GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	2952	1800kW/2250kVA	1640kW/2050kVA
415/240	50	3	0.8	3130	1800kW/2250kVA	1640kW/2050kVA
400/230	50	3	0.8	3248	1800kW/2250kVA	1640kW/2050kVA
380/220	50	3	0.8	3419	1800kW/2250kVA	1640kW/2050kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-P2250****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 4016TAG2A
Air intake system	Turbocharged
Fuel system	Direct Injection
Cylinder arrangement	16 in V
Displacement	61.123L
Bore and stroke	160×190 mm
Compression ratio	13.6:1
Rated speed	1500rpm
Max. Standby power at rated speed	1937kW
Governor type	Electronic

**Exhaust System**

Exhaust gas flow	387 m <sup>3</sup> /min
Exhaust temperature	493°C
Max back pressure	6.5kPa

**Air Intake System**

Max intake restriction	3.7kPa
Combustion air flow	145 m <sup>3</sup> /min
Air flow required for radiator	2100 m <sup>3</sup> /min

**MODEL: BF-P2250****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	209 g/kWh	434 L/h
Fuel consumption @ 75% (Prime Power) Load	203 g/kWh	319 L/h
Fuel consumption @ 50% (Prime Power) Load	202 g/kWh	217 L/h

**Oil System**

Total oil capacity	214L
Oil consumption	0.52g/kWh
Oil sump capacity	147-214L

**Cooling System**

Coolant capacity	350L
Max water temperature	98°C

**MODEL: BF-P2250****400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

**Alternator Data**

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	2080kVA
Alternator Efficiency	96.0%

**MODEL: BF-P2250****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

**STANDARD FEATURES**

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	


**MODEL: BF-P2250**

**400V | 1500rpm | 50Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


**DIMENSIONS & WEIGHT**

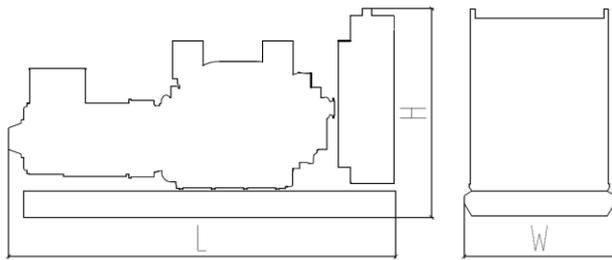

**Standard Configuration (open type)**

Overall Dimensions: 5610×2775×3350 mm

Weight: 13500 kg

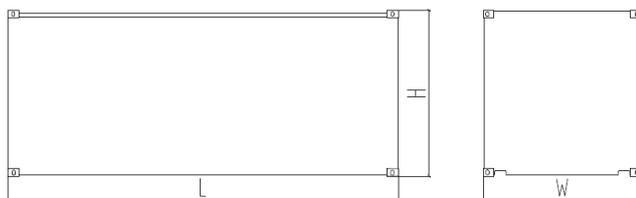

**Soundproof Type (standard 40'ft HQ container)**

Overall Dimensions: 12192×2438×2896 mm

Weight: 23500 kg

*Specifications are subject to change without notice.*

**BAIFA POWER (WUXI) LTD.**  
**WEBSITE: WWW.BAIFAPOWER.COM**  
**EMAIL: MARKETING@BAIFAPOWER.COM**  
**TEL: +86-510-85342633**

Comprehensive Solutions For  
**POWER GENERATION**

