

MODEL: BF-BD165

400V | 1500rpm | 50Hz



ESP Standby Power	165 kVA	PRP Prime Power	150 kVA
ENGINE	Baudouin	ALTERNATOR	LEROY SOMER
	6M11G165/5		TAL-A44-J

GENERAL FEATURES

Engine: Baudouin 6M11G165/5

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-BD165

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	217	132kW/165kVA	120kW/150kVA
415/240	50	3	0.8	230	132kW/165kVA	120kW/150kVA
400/230	50	3	0.8	238	132kW/165kVA	120kW/150kVA
380/220	50	3	0.8	251	132kW/165kVA	120kW/150kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-BD165**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Baudouin 6M11G165/5
Air intake system	Turbo, intercooling
Fuel system	Mechanical pump
Cylinder arrangement	6 cylinders in line
Displacement	6.75 L
Bore and stroke	105×130 mm
Compression ratio	18:1
Rated speed	1500rpm
Max. Standby power at rated speed	152KW
Governor type	Electronic

Exhaust System

Exhaust gas flow	24 m ³ /min
Exhaust temperature	550°C
Max back pressure	6 kPa

Air Intake System

Max intake restriction	6 kPa
Combustion air flow	9.3 m ³ /min
Air flow required for radiator	304.5 m ³ /min

MODEL: BF-BD165**400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	198.7 g/kWh	32L/h
Fuel consumption @ 75% (Prime Power) Load	199.3 g/kWh	24L/h
Fuel consumption @ 50% (Prime Power) Load	202.7 g/kWh	17L/h

Oil System

Total oil capacity	19L
Oil consumption ratio based on fuel consumption data	$\leq 0.2\%$
Oil sump capacity	15-17L

Cooling System

Coolant capacity	20L
Max water temperature	105°C

MODEL: BF-BD165**400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	150kVA
Alternator Efficiency	91.0%

MODEL: BF-BD165**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

Base fuel tank


MODEL: BF-BD165

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

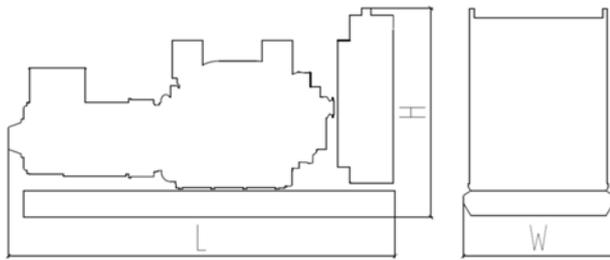

Standard Configuration (open type with base fuel tank)

Overall Dimensions: 2440×830×1410 mm

Weight: 1520 kg

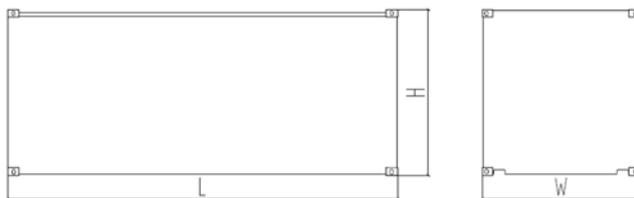

Soundproof Type

Overall Dimensions: 3230×1170×1800 mm

Weight: 2220 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.

WEBSITE: WWW.BAIFAPOWER.COM

EMAIL: MARKETING@BAIFAPOWER.COM

TEL: +86-510-85342633